


600/1000V XLPE Insulated, LSZH Sheathed, Armoured Power Cables (Single Core) FTX300 1RZ1MZ1-R (CU/XLPE/LSZH/AWA/LSZH 600/1000V Class 2)

Indoor Feeder Cables

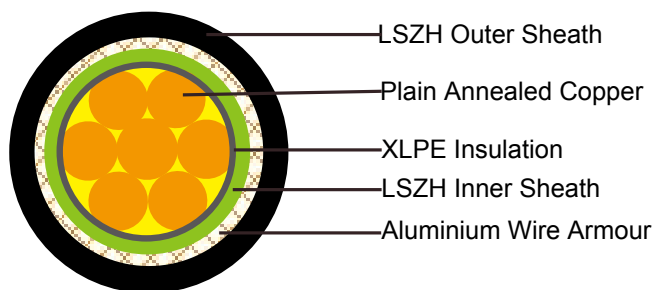

APPLICATION

The cables is mainly used in power stations, mass transit underground passenger systems, airports, petrochemical plants, hotels, hospitals, and high-rise buildings.

STANDARDS

Basic design to BS 6724

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*
Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*
No Toxic Gases	NES 02-713; NF C 20-454

Note: Asterisk * denotes superseded standard.

VOLTAGE RATING

600/1000V



CABLE CONSTRUCTION

Conductor : Plain annealed copper wire, stranded according to IEC 60228 class 2.

Insulation: Extruded cross-linked XLPE compound.

Inner sheath : LSZH Compound

Armouring : Aluminium Wire

Outer Sheath : Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1.

COLOUR CODE

Insulation Colour : Natural

Sheath Colour : Black (other colors upon request)

PHYSICAL AND THERMAL PROPERTIES

Temperature Range During Operation: -30°C ~ 90°C

Temperature Range during Installation : -5°C ~ 50°C

Minimum Bending Radius: 8 x OD

ELECTRICAL PROPERTIES

Dielectric Test:	3500 V r.m.s. x 5' (core / core)
Insulation Resistance	500 MΩ x km (at 20°C)
Short circuit Temperature	250°C (up to 5 secs)

CONSTRUCTION PARAMETERS

Cable Code	Conductor		Diameter Under Armour	Armour Wire Diameter	Nominal Overall Diameter	Approx. Weight
	No. of Core X Cross Section	No. / Nominal Diameter of Strands				
	mm ²	No./mm	mm	mm	mm	kg/km
FTX300 1RZ1MZ1-R 1G70	1x70	19/2.14	15.4	1.25	21.5	960
FTX300 1RZ1MZ1-R 1G95	1x95	19/2.52	17.3	1.25	23.4	1240
FTX300 1RZ1MZ1-R 1G120	1x120	37/2.03	19.1	1.6	25.9	1650
FTX300 1RZ1MZ1-R 1G150	1x150	37/2.25	21.1	1.6	27.9	1970
FTX300 1RZ1MZ1-R 1G185	1x185	37/2.52	23.2	1.6	30.1	2390
FTX300 1RZ1MZ1-R 1G240	1x240	61/2.25	26.2	1.6	33.2	3040
FTX300 1RZ1MZ1-R 1G300	1x300	61/2.52	28.8	1.6	35.8	3790
FTX300 1RZ1MZ1-R 1G400	1x400	61/2.85	32.7	2.0	40.9	4790

FTX300 1RZ1MZ1-R 1G500	1x500	61/3.20	36.2	2.0	44.6	5880
FTX300 1RZ1MZ1-R 1G630	1x630	127/2.52	40.6	2.0	49.2	7400
FTX300 1RZ1MZ1-R 1G800	1x800	127/2.85	45.7	2.5	55.7	9500
FTX300 1RZ1MZ1-R 1G1000	1x1000	127/3.20	50.6	2.5	61.0	11750

ELECTRICAL PROPERTIES

Conductor Operating Temperature : 90°C

Ambient Temperature : 30°C

Current-Carrying Capacities (Amp)

Conductor cross-sectional area	Reference Method 1 (clipped direct)		Reference Method 11 (on a perforated horizontal cable tray or Reference Method 13 [free air])		Reference Method 12 (free air)	In single-way ducts		Laid direct in ground	
	2 cables, single-phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.	2 cables, single-phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.		2 cables, single-phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.	2 cables, single-phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.
1	2	3	4	5	6	7	8	9	10
mm ²	A	A	A	A	A	A	A	A	A
70	303	277	322	293	285	310	280	340	290
95	367	333	389	352	346	365	330	405	345
120	425	383	449	405	402	410	370	460	389
150	488	437	516	462	463	445	405	510	435
185	557	496	587	524	529	485	440	580	490
240	656	579	689	612	625	550	500	670	560
300	755	662	792	700	720	610	550	750	630
400	853	717	899	767	815	640	580	830	700
500	962	791	1016	851	918	690	620	910	770
630	1082	861	1146	935	1027	750	670	1000	840
800	1170	904	1246	987	1119	828	735	1117	931
1000	1261	961	1345	1055	1214	919	811	1254	1038



Voltage Drop (Per Amp Per Meter)


Conductor cross-sectional area	2 cables d.c.	2 cables single-phase a.c.			3 or 4 cables three-phase a.c.			2 cables singlephase a.c.		3 or 4 cables, 3-phase a.c. touching				
		Reference Method 1 & 11 (touching)			Reference Method 1, 11 & 12 (in trefoil touching)			Reference Method 1 & 11 (Flat touching)		In ducts	In ground	In ducts	In ground	
1	2	3			4			5			6	7	8	9
mm ²	mV/A/m	mV/A/m			mV/A/m			mV/A/m			mV/A/m	mV/A/m	mV/A/m	mV/A/m
		r	x	z	r	x	z	r	x	z				
70	0.67	0.68	0.20	0.71	0.59	0.17	0.62	0.6	0.25	0.65	0.80	0.70	0.70	0.61
95	0.49	0.51	0.195	0.55	0.44	0.17	0.47	0.46	0.24	0.52	0.65	0.53	0.56	0.46
120	0.39	0.41	0.190	0.45	0.35	0.165	0.39	0.38	0.24	0.44	0.55	0.43	0.48	0.37
150	0.31	0.33	0.185	0.38	0.29	0.160	0.33	0.31	0.23	0.39	0.50	0.37	0.43	0.32
185	0.25	0.27	0.185	0.33	0.23	0.160	0.28	0.26	0.23	0.34	0.45	0.31	0.39	0.27
240	0.195	0.21	0.180	0.28	0.18	0.155	0.24	0.21	0.22	0.30	0.40	0.26	0.35	0.23
300	0.155	0.17	0.175	0.25	0.145	0.150	0.21	0.17	0.22	0.28	0.37	0.24	0.32	0.21
400	0.115	0.145	0.170	0.22	0.125	0.150	0.195	0.160	0.21	0.27	0.35	0.21	0.30	0.19
500	0.093	0.125	0.170	0.21	0.105	0.145	0.180	0.145	0.20	0.25	0.33	0.20	0.28	0.18
630	0.073	0.105	0.165	0.195	0.092	0.145	0.170	0.135	0.195	0.24	0.30	0.19	0.26	0.17
800	0.056	0.090	0.160	0.190	0.086	0.140	0.165	0.130	0.180	0.23	0.28	0.18	0.24	0.16
1000	0.045	0.092	0.155	0.180	0.080	0.135	0.155	0.125	0.170	0.21	0.26	0.17	0.22	0.15

Note :

r = conductor resistance at operating temperature

x = reactance

z = impedance




600/1000V

Rated Voltage



BS 6724

Standard



Zero

Halogen Free
IEC60754-1
EN50267-2-1



Flame Retardancy
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1



Low Toxicity
NES 02-713/NF C 20-454



Low Corrosivity
IEC60754-2
EN50267-2-2/3
NF C 32-074



Low Smoke Emission
IEC 61034-1&2
EN 50268-1&2/NF C32-073



Reduced Fire Propagation
NF C32-070-2.2(C1)
IEC60332-3-24/EN50266-2-4