


Automotive Cable

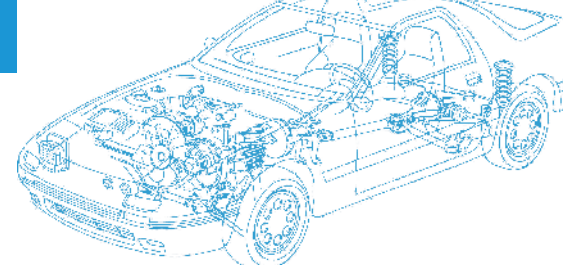


CAVS

Application:

This PVC insulated single-core low tension cable is used for automotive wiring.

Construction:

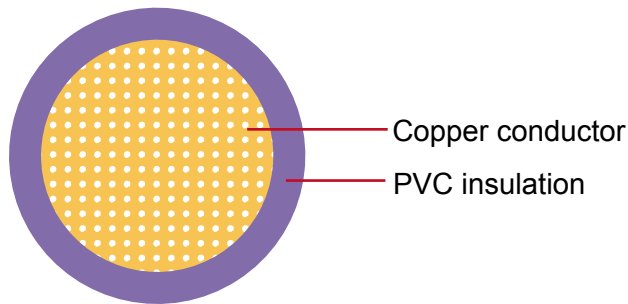

Copper conductor

PVC insulation

Conductor: Cu-ETP1 according to JIS C 3102

Insulation: PVC

Standard Compliance: JASO D 611-94

Technical Parameters:

Operating temperature: - 40 °C to +80 °C

Nominal Cross-section	Conductor			Insulation	Cable		
	No. and Dia. of Wires	Diameter max.	Electrical Resistance at 20°C max.	Thickness Wall nom.	Overall Diameter min.	Overall Diameter max.	Weight approx.
mm ²	No./mm	mm	mΩ/m	mm	mm	mm	kg/km
1 x0.30	7/0.26	0.70	50.20	0.35	1.40	1.50	3
1 x0.50	7/0.32	0.90	32.70	0.35	1.60	1.70	5
1 x0.85	11/0.32	1.10	20.80	0.35	1.80	1.90	7
1 x1.25	16/0.32	1.40	14.30	0.35	2.10	2.20	10

*Note: Other configurations, sizes, colors and length not specified herein are available upon request.