


# Automotive Cable

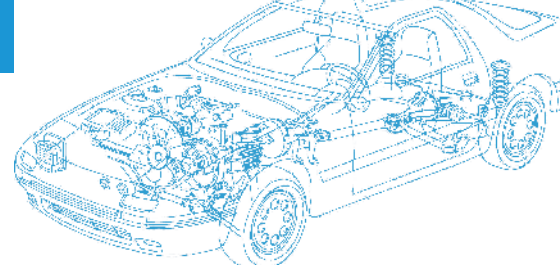


## SGT

### Application:

This PVC insulated single-core cable is used for automotive starters or battery grounds.

### Construction:

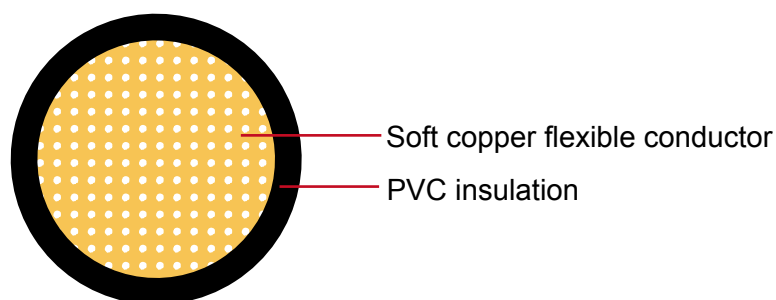

**Conductor:** Soft copper flexible conductor

**Insulation:** PVC

**Standard Compliance:** SAE J1127

### Technical Parameters:

**Operating temperature:** - 40 °C to +80 °C

Size	Conductor			Insulation	Cable	
	Nominal Cross-section	No. and Dia. of Wires	Diameter max.	Thickness Wall nom.	Overall Diameter max.	Weight approx.
AWG	mm <sup>2</sup>	No./mm	mm	mm	mm	kg/km
6	1 x 13.48	266/0.26	4.12	1.52	6.58	152
4	1 x 21.28	420/0.26	6.72	1.65	9.40	243
2	1 x 33.70	665/0.26	8.58	1.65	11.26	368
1	1 x 42.36	836/0.26	9.77	1.65	12.45	454
1/0	1 x 53.91	1064/0.26	11.10	1.65	13.78	568
2/0	1 x 67.04	1323/0.26	12.47	1.65	15.15	697
3/0	1 x 84.42	1666/0.26	14.10	1.98	17.30	886
4/0	1 x 106.76	2107/0.26	15.97	1.98	19.17	1105

\*Note: Other configurations, sizes, colors and length not specified herein are available upon request.



***Caledonian Cables***

Merchant Ind. Centre  
Mill-Lane, Laughton, Lewes, Sussex, BN8 6AJ  
England  
United Kingdom  
Tel: 44- 207- 4195087  
Fax: 44- 207- 8319489  
Email: *sales@caledoniancable.com*