




Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8102

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White.

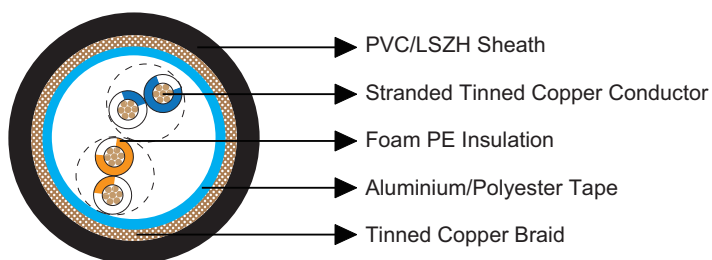

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118102V	2	0.4	0.813	6.9
BE118102H	2	0.4	0.813	6.9