



Caledonian Military Cables

MIL-W-22759/34


Application and Description

These ETFE insulation single-core MIL-W-22759/34 wires are used for MIL-Spec and Aerospace, these cable is a normal weight, high temperature airframe and avionics wire which utilizes a dual layer insulation of cross-linked, modified ethylene tetrafluoroethylene copolymer (ETFE). The layers have contrasting colors to provide a visual indication of possible abrasion or other mechanical damage due to physical abuse during service or installation. ETFE insulation resists high PH cleaning fluids, fuels, lubricants and many other chemicals, MIL-W-22759/34 wires are mechanically tough, flame retardant and weight saving.

Construction Details

Dual layers over conductor

Construction

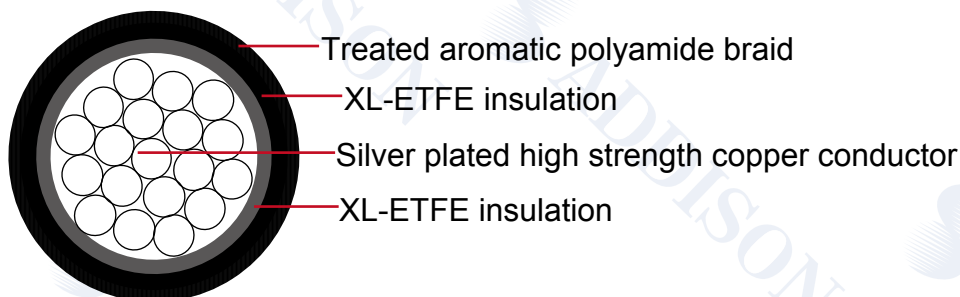

Conductor: Tinned copper

Insulation: Fluoropolymer Cross-linked Modified ETFE Dual

Insulating Material Thickness: 10 mil (0.25 mm)

Jacket: XL-ETFE

Braid: Treated aromatic polyamide for size 2 and larger only

Characteristics

Temperature Rating: 150°C

Voltage Rating: 600 volts

MIL-Spec Wire

SAE AS22759/34

Color Code: 10 basic colors



Caledonian Military Cables

Dimensions and Weight

AWG Size	Conductor Stranding	Conductor Diam. Min		Conductor Diam. Max		Min O.D.		Max O.D.		Approx LBS/MFT
		in	mm	in	mm	in	mm	in	mm	
24	19/36	0.023	0.584	0.025	0.635	0.043	1.092	0.047	1.194	2.3
22	19/34	0.029	0.737	0.031	0.787	0.048	1.219	0.052	1.321	3.2
20	19/32	0.037	0.940	0.039	0.991	0.056	1.422	0.060	1.524	4.7
18	19/30	0.046	1.168	0.049	1.245	0.067	1.702	0.073	1.854	7.2
16	19/29	0.052	1.321	0.055	1.397	0.074	1.880	0.080	2.032	9.0
14	19/27	0.065	1.651	0.069	1.753	0.091	2.311	0.097	2.464	13.8
12	37/28	0.084	2.134	0.089	2.261	0.108	2.743	0.114	2.896	20.5
10	37/26	0.106	2.692	0.113	2.870	0.13	3.302	0.138	3.505	32.4
8	133/29	0.158	4.013	0.173	4.394	0.187	4.750	0.203	5.156	60.3
6	133/27	0.198	5.029	0.217	5.512	0.231	5.867	0.251	6.375	94.5
4	133/25	0.250	6.350	0.274	6.960	0.300	7.620	0.320	8.128	150.0
2	665/30	0.320	8.128	0.340	8.636	0.390	9.906	0.428	10.871	239.0
1	817/30	0.360	9.144	0.380	9.652	0.429	10.897	0.461	11.709	290.0
1/0	1045/30	0.395	10.033	0.425	10.795	0.469	11.913	0.501	12.725	377.0
2/0	1330/30	0.440	11.176	0.475	12.065	0.529	13.437	0.561	14.249	487.0

