



Caledonian Military Cables

MIL-W-81044/12


Applications:

MIL-W-81044 wire may be used for airframe, avionics, military vehicle, shipboard, missile and other electronic applications, Additionally, the dual layer, lightweight, high temperature wire offers outstanding performance that makes it suitable for many functions where high density cabling and harnessing are required, these wires have excellent resistance to cut-through, abrasion, cold flow, shrink back, notch propagation and common chemicals.

Construction Details

The jacket is XL-PVDF

Construction

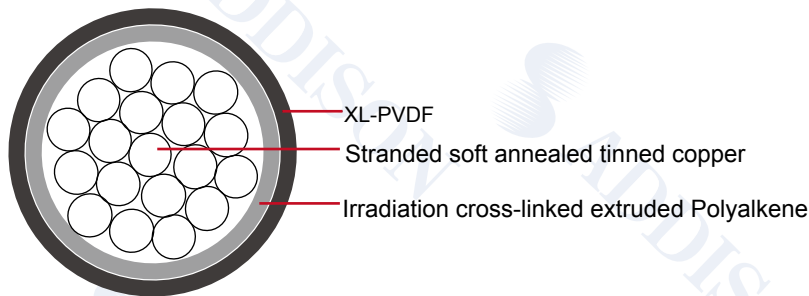

Conductor: Stranded soft annealed tinned copper conductor

Insulation: Irradiation cross-linked extruded Polyalkene insulation

jacket: Extruded XL Polyvinylidene Fluoride (XL-PVDF)

Insulating Material Thickness: 15 mil (0.4 mm) to 21 mil (0.5mm)

Characteristics


Temperature Rating: 150°C

Voltage Rating: 600 volts

MIL-W-81044/12

SAE AS81044

10 basic colors



Caledonian Military Cables

Dimensions and Weight

AWG Size	Conductor Stranding	Min O.D.		Max O.D.		Approx LBS/ MFT
		In	Mm	In	mm	
30	7/38	0.025	0.635	0.029	0.737	0.71
28	7/36	0.028	0.711	0.032	0.813	0.96
26	19/38	0.032	0.813	0.036	0.914	1.40
24	19/36	0.038	0.965	0.042	1.067	2.10
22	19/34	0.045	1.143	0.049	1.245	3.10
20	19/32	0.053	1.346	0.057	1.448	4.60
18	19/30	0.063	1.600	0.067	1.702	7.00
16	19/29	0.069	1.753	0.075	1.905	8.90
14	29/27	0.085	2.159	0.093	2.362	13.90
12	37/28	0.104	2.642	0.112	2.845	21.70

