



400Hz Cables

400Hz Airport Cables Single Core

» Applications

These cables are designed for 400 Hz systems for power supply of aircraft, computer systems and radar stations, suitable for laying in earth, in water, outdoors, indoors and in cable ducts.


» Standards

VDE 0295

» Construction

Conductor: Stranded copper conductor, Class 5 to VDE 0295/IEC 60228.

Insulation: TPE.

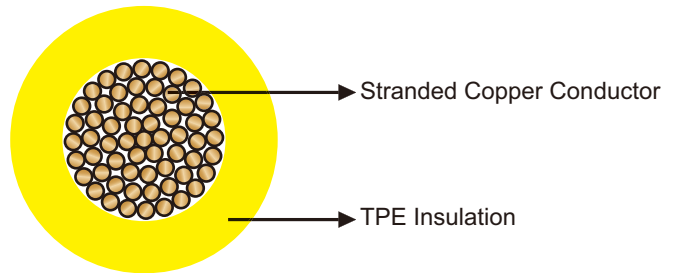

» Technical Data

Rated Voltage U ₀ /U (U _m)	600/1000V
Operating Temperatures	-40°C~+90°C
Minimum Bending Radius	static: 6×OD; dynamic: 7×OD
Halogen Free	Yes
Abrasion Resistant	Yes
UV Resistant	Yes
Oil Resistant	Yes

» Dimensions and Weight

Construction No. ×mm ²	Nominal Overall Diameter mm	Nominal Weight kg/km
1×35	11.5	430
1×50	12.6	665
1×70	14.0	910
1×120	23.0	1545