




CPMS (Car Park Management System)

Communication Cable FFX200 05mROZ1-R/F 3P0.75

FFX200 05mROZ1-R 3P0.75 (CU/MGT+XLPE/OSCR/LSZH 3×2×0.75mmsq 300/500V class 2)

FFX200 05mROZ1-F 3P0.75 (CU/MGT+XLPE/OSCR/LSZH 3×2×0.75mmsq 300/500V class 5)

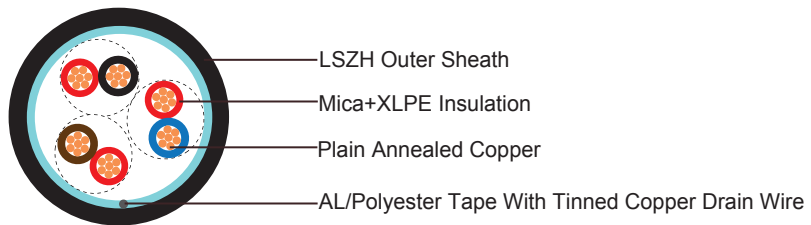

APPLICATIONS

The cables are single pair stranded flexible cables sheathed with thermoplastic LSZH compound. The cables have the ability to restrict the propagation of the flame in the event of a fire. This is especially important to slow down the spreading of the fire as the cables may pass from one area to another within a building. Applications can be found in control and power circuits, power stations, underground tunnels, lifts, escalators, and high-rise buildings.

STANDARDS

| | |
|---------------------------|------------------------------------|
| Basic design | BS 7629 |
| Halogen Free | IEC 60754-1 |
| No corrosive gas emission | IEC 60754-2 |
| Minimum Smoke Emission | IEC 61034-1/2 |
| Reduced Fire Propagation | IEC 60332-3C / NF C 32070-2.2 (C1) |
| Flame Retardance | IEC 60332-1 / NF C 32-070-2.1 (C2) |
| Fire Resistance | IEC 60331 / NF C 32070-2.3(CR1) |

VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

Conductors: Plain annealed copper wire, stranded according to EN 60228 class 2 or class 5.

Insulation: Mica glass tape covered by extruded cross-linked XLPE compound.

Cable Elements: Insulated cores are twisted to form pairs.

Cabling: Pairs are cabled together.

Overall Screen: Aluminum/polyester tape with copper drain wire.

Outer Sheath: Thermoplastic LSZH compound.

COLOUR CODE

Insulation Colour: According to IEC 60189-2 (other colour code on request).

Sheath Colour: Colour red (other colours on request).

ELECTRICAL PROPERTIES

| | |
|---------------------------|--------------------------------|
| Dielectric test: | 2000 V r.m.s. x 5' (core/core) |
| Insulation resistance | 1000 MΩ x km (at 20°C) |
| Short circuit temperature | 250°C |

PHYSICAL AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -30°C – +90°C

Temperature range during installation (mobile state): -20°C – +50°C

Minimum bending radius: 8 × Overall Diameter

CONSTRUCTION PARAMETERS


FFX200 05mROZ1-R 3P0.75

FFX200 05mROZ1-F 3P0.75

| No.of pair | Nominal Cross Sectional Area | Number & Nominal Diameter of Strands | Nominal Insulation Thickness | Nominal Sheath Thickness | Nominal Overall Diameter | Approx. Weight |
|------------|------------------------------|--------------------------------------|------------------------------|--------------------------|--------------------------|----------------|
| | mm ² | No/mm | mm | mm | mm | kg/km |
| 3 | 0.75 | 7/0.37 | 0.6 | 1.0 | 11.5 | 126 |
| 3 | 0.75 | 24/0.2 | 0.6 | 1.0 | 11.5 | 126 |



Standard



Halogen Free
IEC60754-1/
EN50267-2-1



Low Corrosivity
IEC60754-2
EN50267-2-2/3
NF C 32-074



Low Smoke Emission
IEC 61034-1&2
EN 50268-1&2/NF C32-073



Reduced Fire Propagation
NF C32-070-2.2(C1)
IEC60332-3-24
EN50266-2-4



Flame Retardancy
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265



Fire Resistance
IEC 60331
/NF C 32070-2.3(CR1)