




SACS (Security Access Control System)

Lock Cable FFX200 05mRZ1-R/F 2G1.0

FFX200 05mRZ1-R 2G1.0 (CU/MGT+XLPE/LSZH 2×1.0mmsq 300/500V class 2)

FFX200 05mRZ1-F 2G1.0 (CU/MGT+XLPE/LSZH 2×1.0mmsq 300/500V class 5)

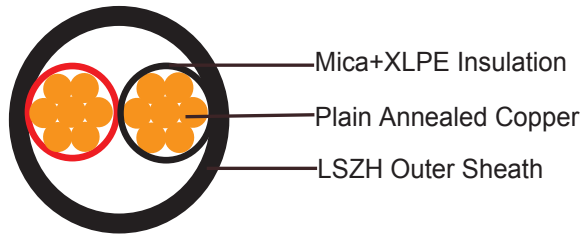

APPLICATIONS

The cables are multicore stranded flexible cables sheathed with thermoplastic LSZH compound. The cables have the ability to restrict the propagation of the flame in the event of a fire. This is especially important to slow down the spreading of the fire as the cables may pass from one area to another within a building. Applications can be found in control and power circuits, power stations, underground tunnels, lifts, escalators, and high-rise buildings.

STANDARDS

Basic design	BS 7629-1
Halogen Free	IEC 60754-1
No corrosive gas emission	IEC 60754-2
Minimum Smoke Emission	IEC 61034-1/2
Reduced Fire Propagation	IEC 60332-3C / NF C 32070-2.2 (C1)
Flame Retardance	IEC 60332-1 / NF C 32-070-2.1 (C2)
Fire Resistance	IEC 60331 / NF C 32070-2.3(CR1)

VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

Conductor: Plain annealed copper wire, stranded according to IEC(EN) 60228 class 2 or class 5.

Insulation: Mica glass tape covered by extruded cross-linked XLPE compound.

Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1.

ELECTRICAL PROPERTIES

Dielectric test:	2000 V r.m.s. x 5' (core/core)
Insulation resistance	1000 MΩ x km (at 20°C)
Short circuit temperature	250°C

PHYSICAL AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -30°C – +90°C

Temperature range during installation (mobile state): -20°C – +50°C

Minimum bending radius: 8 × Overall Diameter

CONSTRUCTION PARAMETERS


FFX200 05mRZ1-R 2G1.0

FFX200 05mRZ1-F 2G1.0

No. of core	Nominal Cross Sectional Area mm ²	Number & Nominal Diameter of Strands No/mm	Nominal Insulation Thickness mm	Nominal Sheath Thickness mm	Nominal Overall Diameter mm	Approx. Weight kg/km
2	1.0	7/0.44	0.5	0.5	7.1	58
2	1.0	32/0.2	0.5	0.5	7.1	58



Standard



Halogen Free
IEC60754-1



Low Corrosivity
IEC60754-2
EN50267-2-2/3
NF C 32-074



Low Smoke Emission
IEC 61034-1&2
EN 50268-1&2/NF C32-073



Reduced Fire Propagation
NF C32-070-2.2(C1)
IEC60332-3-24
EN50266-2-4



Flame Retardancy
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1



Fire Resistance
IEC 60331
/NF C 32070-2.3(CR1)