



TR2031- Loop Detector Feeder Cable


Application and Description:

TR2031 loop detector feeder cable is a copper communications cable sheathed with medium density polyethylene (MDPE) designed for installation in a ducted network. Armoured feeder cables are used to feed electrical current to inductive cable loops and designed for direct burial underground.

Standard and Approval:

BS 6500

Cable Construction:

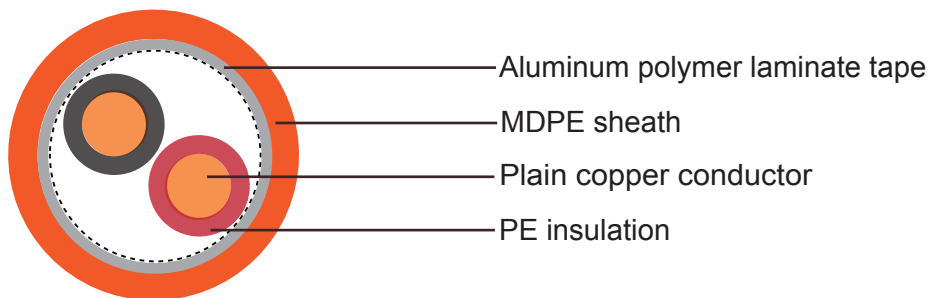


Non Armored TR2031

- **Conductor:** Solid plain annealed copper, comply with IEC 60228 for Class 1
- **Insulation:** Polythene (PE), comply with IEC 60708
- **Core Identification:** 1 pair – red, black
2 pair – red, yellow, blue, black laid up in quad formation in order of rotation
- **Screen (for Non Armoured Cable Only):** Aluminum polymer laminate tape comply with IEC 60708
- **Inner Sheath (for Armoured Cable Only):** Medium density polyethylene (MDPE), comply with IEC 60708



- **Armor (for Armoured Cable Only):** Galvanized steel wires to BS EN 10257-1
- **Outer Sheath:** Medium density polyethylene (MDPE), comply with IEC 60708.
- **Outer Sheath Color:** Orange/Black

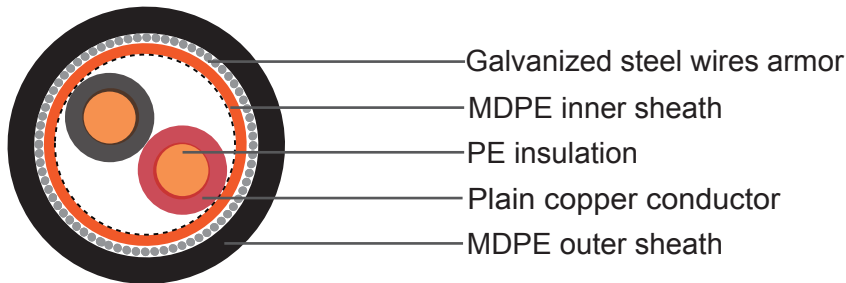

Armored TR2031

Technical Characteristics:

- **Rated voltage:** 600/Kft volts
- **Minimum bending radius:** $8 \times \varnothing$
- **Rated temperature:** $+70^{\circ} \text{C}$
- **Conductor resistance at 20°C :** 1.5mm^2 ---- 12.1ohms/km
 2.5mm^2 ---- 7.41ohms/km
- **Insulation resistance:** $>1500 \text{ M}\Omega \times \text{km}$
- **Loop inductance:** $630\mu\text{H}/\text{km}(1\text{P})$ $720\mu\text{H}/\text{km}(2\text{P})$
- **Capacitance:**

unarmored		armored	
1.5 mm ²	2.5 mm ²	1.5 mm ²	2.5 mm ²
<75 pF/m	39 pF/m (1P)	<75 pF/m	64 pF/m (1P)
	52 pF/m (2P)		53.5 pF/m (2P)

-Current rating:

Unarmored in air (30°C)		armored in ground (15°C, 1.2°C m/W)	
1.5 mm ²	2.5 mm ²	1.5 mm ²	2.5 mm ²
24*	33*	32*	41*

*These ratings are based on only two cores loaded simultaneously. In two pair cables where all four cores could be loaded simultaneously, the above values should be multiplied by 0.78.





Cable Parameter:

Number of Pairs	Nominal Conductor Area	Nominal Conductor Stranding	Insulation Thickness	Inner Sheath Thickness	Nominal diameter of armour wire	Outer Sheath Thickness	Nominal O/D	Approx Cable Weight
	mm ²	NO./mm	mm	mm	mm	mm	mm	Kg/km
Unarmored cables								
1	1.5	1/1.38	0.60	0.7	-	1.4	9.0	67
2 (Q)	1.5	1/1.38	0.60	0.7	-	1.4	10.2	118
1	2.5	1/1.78	0.70	0.7	-	1.4	10.4	99
2 (Q)	2.5	1/1.78	0.70	0.7	-	1.4	11.8	166
Armored cables								
1	1.5	1/1.38	0.60	0.7	0.9	1.4	11.9	265
2 (Q)	1.5	1/1.38	0.60	0.7	0.9	1.4	13.2	335
1	2.5	1/1.78	0.70	0.7	0.9	1.4	12.7	336
2 (Q)	2.5	1/1.78	0.70	0.7	0.9	1.4	14.1	375