



H07RN-F

Application and Description

These cables are designed to provide high flexibility and have the capacity to withstand weather, oils/greases, mechanical and thermal stresses. Applications include handling equipment, mobile power supplies, worksites, stage and audio visual equipment, port areas and dams. Also suitable for fixed installations on plaster, temporary buildings and residential barracks and for use in drainage and water treatment, cold environments and severe industrial environments. Max operating voltage in single or three phase system is Uo/U 476/825 volts. In a direct current system max operating voltage is Uo/U 619/1238 volts. If in a fixed or protected installation Uo/U is 600/1000 volts. These cables are resistant to flame, acids, and oil penetration.

Standard and Approval


UNE 21027 Part 4, <HAR> HD22.4 S3, VDE-0282 Part-4, CEI 20-19/4 / 20-35 (EN60332-1), IEC 60245-4, CE low voltage directive 73/23/EEC & 93/68/EEC., ROHS compliant

Cable Construction


- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- Rubber core insulation EI4 to VDE-0282 Part-1
- Color code VDE-0293-308 and HD 186
- Green-yellow grounding, 3 conductors and above
- Polychloroprene rubber (neoprene) jacket EM2

Technical Characteristics

- Working voltage: 450/750 volts
- Test voltage: 2500 volts
- Flexing bending radius: 6 x Ø
- Fixed bending radius: 4.0 x Ø
- Flexing Temperature: -25° C to +60° C
- Fixed Temperature: -40° C to +60° C
- Short circuit temperature: +200 ° C
- Flame retardant: IEC 60332.1
- Insulation resistance: 20 MΩ x km

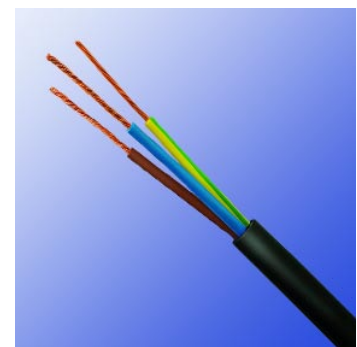

H07RN-F



- Polychloroprene rubber outer jacket
- Green/Yellow wire
- Bare copper conductor
- Rubber insulation

H07RN-F



Cable Parameter

AWG	No. of Cores x Nominal Cross Sectional Area # x mm ²	Nominal Thickness of Insulation mm	Nominal Thickness of Sheath mm	Nominal Overall Diameter mm min-max	Nominal Copper Weight kg/km	Nominal Weight kg/km
17(32/32)	2 x 1	0.8	1.3	7.7-10	19	89
17(32/32)	3 x 1	0.8	1.4	8.3-10.7	29	111
17(32/32)	4 x 1	0.8	1.5	9.2-11.9	38	146
16(30/30)	1 x 1.5	0.8	1.4	5.7-7.1	14.4	59
16(30/30)	2 x 1.5	0.8	1.5	8.5-11.0	29	135
16(30/30)	3 x 1.5	0.8	1.6	9.2-11.9	43	165
16(30/30)	4 x 1.5	0.8	1.7	10.2-13.1	58	200
16(30/30)	5 x 1.5	0.8	1.8	11.2-14.4	72	240
16(30/30)	7 x 1.5	0.8	2.6	14.5-17.5	101	385
16(30/30)	12 x 1.5	0.8	2.9	17.6-22.4	173	516
16(30/30)	19 x 1.5	0.8	3.2	20.7-26.3	274	800
16(30/30)	24 x 1.5	0.8	3.5	24.3-30.7	346	882
14(50/30)	1 x 2.5	0.9	1.4	6.3-7.9	24	72
14(50/30)	2 x 2.5	0.9	1.7	10.2-13.1	48	195
14(50/30)	3 x 2.5	0.9	1.8	10.9-14.0	72	235
14(50/30)	4 x 2.5	0.9	1.9	12.1-15.5	96	290
14(50/30)	5 x 2.5	0.9	2	13.3-17.0	120	345
14(50/30)	7 x 2.5	0.9	2.8	16.5-20.0	168	520
14(50/30)	12 x 2.5	0.9	3.1	20.6-26.2	288	810
14(50/30)	19 x 2.5	0.9	3.5	25.5-31.0	456	1200
14(50/30)	24 x 2.5	0.9	3.9	28.8-36.4	576	1650
12(56/28)	1 x 4	1	1.5	7.2-9.0	38	99
12(56/28)	2 x 4	1	1.8	11.8-15.1	77	270
12(56/28)	3 x 4	1	1.9	12.7-16.2	115	320
12(56/28)	4 x 4	1	2	14.0-17.9	154	395
12(56/28)	5 x 4	1	2.2	15.6-19.9	192	485
12(56/28)	7 x 4	1	3.1	18.2-21.8	269	681
10(84/28)	1 x 6	1	1.6	7.9-9.8	58	130
10(84/28)	3 x 6	1	2.1	14.1-18.0	173	495
10(84/28)	4 x 6	1	2.3	15.7-20.0	230	610
10(84/28)	5 x 6	1.2	3.6	17.5-22.2	288	760
8(80/26)	1 x 10	1.2	1.8	9.5-11.9	96	230
8(80/26)	3 x 10	1.2	3.3	19.1-24.2	288	880
8(80/26)	4 x 10	1.2	3.4	20.9-26.5	384	1060
8(80/26)	5 x 10	1.2	3.6	22.9-29.1	480	1300
6(128/26)	1 x 16	1.2	1.9	10.8-13.4	154	320
6(128/26)	3 x 16	1.2	3.5	21.8-27.6	461	1090
6(128/26)	4 x 16	1.2	3.6	23.8-30.1	614	1345
6(128/26)	5 x 16	1.2	3.9	26.4-33.3	768	1680



Spanish Code

AWG	No. of Cores x Nominal Cross Sectional Area # x mm ²	Nominal Thickness of Insulation mm	Nominal Thickness of Sheath mm	Nominal Overall Diameter mm min-max	Nominal Copper Weight kg/km	Nominal Weight kg/km
4(200/26)	1 x 25	1.4	2	12.7-15.8	240	450
4(200/26)	4 x 25	1.4	4.1	28.9-36.6	960	1995
4(200/26)	5 x 25	1.4	4.4	32.0-40.4	1200	2470
2(280/26)	1 x 35	1.4	2.2	14.3-17.9	336	605
2(280/26)	3 x 35	1.4	4.1	29.3-37.1	1008	1900
2(280/26)	4 x 35	1.4	4.4	32.5-41.1	1344	2645
2(280/26)	5 x 35	1.4	4.7	37.0-45.0	1680	2810
1(400/26)	1 x 50	1.6	2.4	16.5-20.6	480	825
1(400/26)	4 x 50	1.6	4.8	37.7-47.5	1920	3635
1(400/26)	5 x 50	1.6	5.1	40.0-50.8	2400	4050
2/0(356/24)	1 x 70	1.6	2.6	18.6-23.3	672	1090
2/0(356/24)	4 x 70	1.6	5.2	42.7-54.0	2688	4830
3/0(485/24)	1 x 95	1.8	2.8	20.8-26.0	912	1405
3/0(485/24)	4 x 95	1.8	5.9	48.4-61.0	3648	6320
4/0(614/24)	1x 120	1.8	3	22.8-28.6	1152	1746
4/0(614/24)	4 x 120	1.8	6	53.0-66.0	4608	6830
300MCM (765/24)	1 x 150	2	3.2	25.2-31.4	1440	1887
300MCM (765/24)	4 x 150	2	6.4	58.0-73.0	5760	8320
350MCM (944/24)	1 x 185	2.2	3.4	27.6-34.4	1776	2274
350MCM (944/24)	4 x 185	2.2	6.8	64.0-80.0	7104	9800
500MCM (1221/24)	1x 240	2.4	3.5	30.6-38.3	23.4	2956
500MCM (1221/24)	4x 240	2.2	7.0	72.0-90.0	9216	12100
-	1 x 300	2.6	3.6	33.5-41.9	2880	3479