


PE Insulated, LSZH Sheathed, CWB Screened Instrumentation Cables (Multipair)

RE-2Y(C)H 90°C / 300V

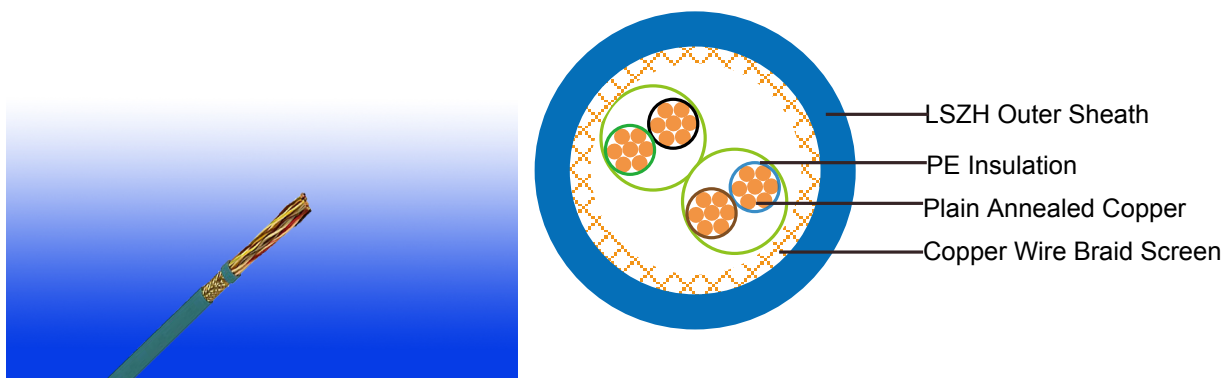

APPLICATION

These cables are used for transmission of analogue and digital signals in instrument and control systems at chemistry and petrochemistry industry plants, power plants, natural gas and petroleum plants, etc...

These cables are used in the environments which have no corrosive gases are emitted in the event of fire. In case of fire, these cables inhibit the propagation of the flames whereby the development of smoke is extremely low. Instrumentation cables are not allowed for direct connection to a low impedance sources, e.g. public mains electricity supply. With blue sheath it is suitable for intrinsically safe systems. These cables are not recommended for direct burial. They are for indoor and outdoor installation, in dry and wet locations; on racks, trays, in conduits.

STANDARDS

Basic design to EN 50288-7

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*
Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*



No Toxic gases	NES 02-713; NF C 20-454
Sunlight Resistance	UL 1581 section 1200
Oil Resistance	ICEA S-73-532**

Note: Asterisk * denotes superseded standard, **Test temperature +60°C, duration 4h. Retention: min 60% of tensile strength/min.60% of elongation.

VOLTAGE RATING

300V

CABLE CONSTRUCTION

Conductor: Annealed copper solid or plain copper stranded to IEC 60228 Class 2.

Insulation: PE compound, EN 50290. 2-23.

Pair: Two conductors twisted to form a pair

Lay-up: Pairs laid up in layers of optimum pitch

Separator: Polyester tape

Overall Screen: Tinned copper wire braid

Outer Sheath: Thermoplastic LSZH compound type to EN 50290-2-27.

COLOUR CODE

Insulation: Black / White, continuously numbered on white core(1, 2..)for multipair.

Outer Sheath: Black or blue for intrinsically safe systems

PHYSICAL AND THERMAL PROPERTIES

Temperature Range During Operation (Fixed State): -30°C – +90°C

Temperature Range During Installation (Mobile State): -5°C – +50°C

Minimum Bending Radius: 7.5 X Overall Diameter

ELECTRICAL PROPERTIES

Conductor Area Size	mm ²	0.5	0.75	1.0	1.3	1.5
Insulation thickness (nominal)	mm	0.35	0.38	0.4	0.45	0.45
Conductor resistance (20°C)	Ω/km	36.7	25	18.5	14.2	12.3
Insulation resistance (20°C)	MΩ.km(Min.)	5000				
Mutual Capacitance (1 kHz)	pF/m(Max.)					
	≤ 4 pairs	115	115	115	120	120
	all other pairs	90	90	90	105	105
Capacitance unbalance(1 kHz)	pF/500 m (Max.)	500				

L / R (ratio) (max.)		$\mu\text{H}/\Omega$	25	25	25	40	40
Operating voltage Urms		V	300	300	300	300	300
Test Voltage	Core to Core	V	1500	1500	1500	1500	1500
	Core to Screen	V	1500	1500	1500	1500	1500

CONSTRUCTION PARAMETERS

Caledonian Cable Code	RE-2Y(C)H	
	No. of Pairsx2xCross Section	Copper Weight
	No.x2xmm ²	Kg/km
0.5mm ² , Multipair		
RE-2Y(C)H 2P0.5	2x2x0.50	10.7
RE-2Y(C)H 3P0.5	3x2x0.50	11.1
RE-2Y(C)H 4P0.5	4x2x0.50	11.9
RE-2Y(C)H 6P0.5	6x2x0.50	13.6
RE-2Y(C)H 8P0.5	8x2x0.50	14.2
RE-2Y(C)H 12P0.5	12x2x0.50	16.4
RE-2Y(C)H 16P0.5	16x2x0.50	18.2
RE-2Y(C)H 20P0.5	20x2x0.50	19.7
RE-2Y(C)H 24P0.5	24x2x0.50	21.1
0.75mm ² , Multipair		
RE-2Y(C)H 2P0.75	2x2x0.75	11.4
RE-2Y(C)H 3P0.75	3x2x0.75	11.9
RE-2Y(C)H 4P0.75	4x2x0.75	12.7
RE-2Y(C)H 6P0.75	6x2x0.75	14.6
RE-2Y(C)H 8P0.75	8x2x0.75	15.4
RE-2Y(C)H 12P0.75	12x2x0.75	17.8
RE-2Y(C)H 16P0.75	16x2x0.75	19.8
RE-2Y(C)H 20P0.75	20.x2x0.75	21.5
RE-2Y(C)H 24P0.75	24x2x0.75	23.1
1.0mm ² , Multipair		



Caledonian Cable Code	RE-2Y(C)H	
	No. of Pairsx2xCross Section	Copper Weight
	No.x2xmm ²	Kg/km
RE-2Y(C)H 2P1.0	2x2x1.0	12.3
RE-2Y(C)H 3P1.0	3x2x1.0	12.8
RE-2Y(C)H 4P1.0	4x2x1.0	13.7
RE-2Y(C)H 6P1.0	6x2x1.0	15.6
RE-2Y(C)H 8P1.0	8x2x1.0	16.4
RE-2Y(C)H 12P1.0	12x2x1.0	19.0
RE-2Y(C)H 16P1.0	16x2x1.0	21.2
RE-2Y(C)H 20P1.0	20x2x1.0	23.5
RE-2Y(C)H 24P1.0	24x2x1.0	25.3
1.3mm ² , Multipair		
RE-2Y(C)H 2P1.3	2x2x1.3	12.9
RE-2Y(C)H 3P1.3	3x2x1.3	13.5
RE-2Y(C)H 4P1.3	4x2x1.3	14.5
RE-2Y(C)H 6P1.3	6x2x1.3	16.7
RE-2Y(C)H 8P1.3	8x2x1.3	17.4
RE-2Y(C)H 12P1.3	12x2x1.3	20.2
RE-2Y(C)H 16P1.3	16x2x1.3	22.6
RE-2Y(C)H 20P1.3	20x2x1.3	25.1
RE-2Y(C)H 24P1.3	24x2x1.3	27.0

Note : Other conductor sizes & core configurations are available upon request.



300/500V

Rated Voltage



EN 50288-7

Standard



Flame Retardancy
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1



Reduced Fire Propagation
NF C32-070-2.2(C1)
IEC60332-3-24
EN50266-2-4




Low Toxicity
NES 02-713/NF C 20-454



Low Corrosivity
IEC60754-2
EN50267-2-2/3
NF C 32-074



Low Smoke Emission
IEC 61034-1&2
EN 50268-1&2/NF C32-073



Zero

Halogen Free
IEC60754-1
EN50267-2-1