



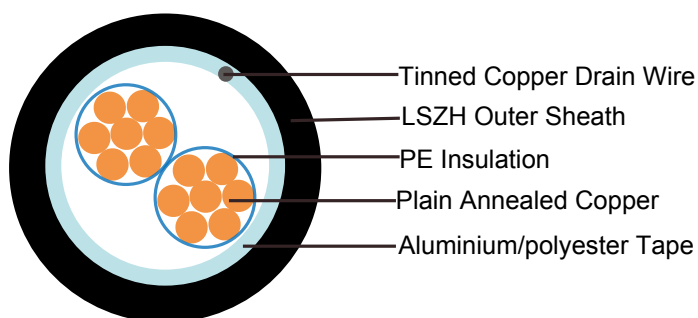

PE Insulated, LSZH Sheathed & Overall Screened Instrumentation Cables (Multicore)

RE-2Y(St)H 90°C / 500V

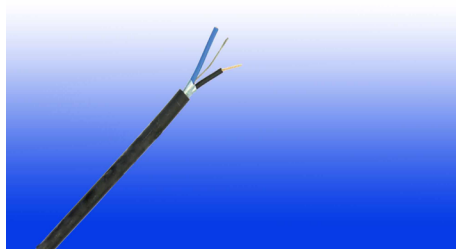

APPLICATION

The LSZH sheathed cables are generally use for indoor installation and suitable for wet and damp areas. Generally, the cables are used within industrial process manufacturing plants for communication, data and voice transmission signals and services. Also used for the interconnection of electrical equipment and instruments, the LSZH sheath can reduce toxic smoke and fume emission.

STANDARDS

Basic design to EN 50288-7

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*
Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*
No Toxic gases	NES 02-713; NF C 20-454
Sunlight Resistance	UL 1581 section 1200
Oil Resistance	ICEA S-73-532**

Note: Asterisk * denotes superseded standard, ** denotes Test temperature +60°C, duration 4h. Retention: min 60% of tensile strength/min.60% of elongation, *** denotes optional.

VOLTAGE RATING

500V

CABLE CONSTRUCTION

Conductor: Annealed copper solid or plain copper stranded to IEC 60228 Class 2.

Insulation: PE compound, EN 50290. 2-23.

Overall Screen: Aluminium/polyester tape with tinned copper drain wire, 0.5mm².

Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1 (Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered.). UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option.

COLOUR CODE

Insulation: Black numbered

Outer Sheath: Black or blue for intrinsically safe systems

PHYSICAL AND THERMAL PROPERTIES

Temperature Range During Operation (Fixed State): -30°C – +90°C

Temperature Range During Installation (Mobile State): -5°C – +50°C

Minimum Bending Radius: 7.5 X Overall Diameter

ELECTRICAL PROPERTIES

Conductor Area Size		mm ²	0.5	0.75	1.0	1.3	1.5	2.5
Insulation thickness (nominal)		mm	0.55	0.55	0.55	0.6	0.6	0.7
Conductor resistance (20°C)		Ω/km	36.0	24.5	18.5	13.9	12.1	7.4
Insulation resistance (20°C)		MΩ.km(Min.)	5000					
Mutual Capacitance (1 kHz)		pF/m(Max.)	115					
Capacitance unbalance(1 kHz)		pF/500 m (Max.)	500					
L / R (ratio) (max.)		μH/Ω	25	25	25	40	40	60
Operating voltage		V	500					
Test Voltage U _{rms}	Core to Core	V	2000					
	Core to Screen	V	2000					



CONSTRUCTION PARAMETERS

Caledonian Cable Code	RE-2Y(St)H		
	No. of Cores x1xCross Section	Nominal Insulation Thickness	Nominal Outer Sheath Thickness
	No.x1xmm ²	mm	mm
0.5mm ² , Multicore			
RE-2Y(St)H 2C0.5	2x1x0.5	0.55	0.9
RE-2Y(St)H 3C0.5	3x1x0.5	0.55	0.9
RE-2Y(St)H 4C0.5	4x1x0.5	0.55	0.9
RE-2Y(St)H 5C0.5	5x1x0.5	0.55	0.9
RE-2Y(St)H 8C0.5	8x1x0.5	0.55	1.0
RE-2Y(St)H 10C0.5	10x1x0.5	0.55	1.0
RE-2Y(St)H 12C0.5	12x1x0.5	0.55	1.0
RE-2Y(St)H 14C0.5	14x1x0.5	0.55	1.0
RE-2Y(St)H 16C0.5	16x1x0.5	0.55	1.1
RE-2Y(St)H 20C0.5	20x1x0.5	0.55	1.1
RE-2Y(St)H 24C0.5	24x1x0.5	0.55	1.1
RE-2Y(St)H 27C0.5	27x1x0.5	0.55	1.2
RE-2Y(St)H 30C0.5	30x1x0.5	0.55	1.2
RE-2Y(St)H 37C0.5	37x1x0.5	0.55	1.2
RE-2Y(St)H 40C0.5	40x1x0.5	0.55	1.2
0.75mm ² , Multicore			
RE-2Y(St)H 2C0.75	2x1x0.75	0.55	0.9
RE-2Y(St)H 3C0.75	3x1x0.75	0.55	0.9
RE-2Y(St)H 4C0.75	4x1x0.75	0.55	0.9
RE-2Y(St)H 5C0.75	5x1x0.75	0.55	0.9
RE-2Y(St)H 8C0.75	8x1x0.75	0.55	1.0
RE-2Y(St)H 10C0.75	10x1x0.75	0.55	1.0
RE-2Y(St)H 12C0.75	12x1x0.75	0.55	1.0
RE-2Y(St)H 14C0.75	14x1x0.75	0.55	1.1
RE-2Y(St)H 16C0.75	16x1x0.75	0.55	1.1
RE-2Y(St)H 20C0.75	20x1x0.75	0.55	1.1
RE-2Y(St)H 24C0.75	24x1x0.75	0.55	1.2


Caledonian Cable Code	RE-2Y(St)H		
	No. of Cores x1xCross Section	Nominal Insulation Thickness	Nominal Outer Sheath Thickness
	No.x1xmm ²	mm	mm
RE-2Y(St)H 27C0.75	27x1x0.75	0.55	1.2
RE-2Y(St)H 30C0.75	30x1x0.75	0.55	1.2
RE-2Y(St)H 37C0.75	37x1x0.75	0.55	1.2
RE-2Y(St)H 40C0.75	40x1x0.75	0.55	1.3
1.0mm ² , Multicore			
RE-2Y(St)H 2C1.0	2x1x1.0	0.55	0.9
RE-2Y(St)H 3C1.0	3x1x1.0	0.55	0.9
RE-2Y(St)H 4C1.0	4x1x1.0	0.55	0.9
RE-2Y(St)H 5C1.0	5x1x1.0	0.55	0.9
RE-2Y(St)H 8C1.0	8x1x1.0	0.55	1.0
RE-2Y(St)H 10C1.0	10x1x1.0	0.55	1.0
RE-2Y(St)H 12C1.0	12x1x1.0	0.55	1.0
RE-2Y(St)H 14C1.0	14x1x1.0	0.55	1.1
RE-2Y(St)H 16C1.0	16x1x1.0	0.55	1.1
RE-2Y(St)H 20C1.0	20x1x1.0	0.55	1.1
RE-2Y(St)H 24C1.0	24x1x1.0	0.55	1.2
RE-2Y(St)H 27C1.0	27x1x1.0	0.55	1.2
RE-2Y(St)H 30C1.0	30x1x1.0	0.55	1.2
RE-2Y(St)H 37C1.0	37x1x1.0	0.55	1.2
RE-2Y(St)H 40C1.0	40x1x1.0	0.55	1.3
1.3mm ² , Multicore			
RE-2Y(St)H 2C1.3	2x1x1.3	0.6	0.9
RE-2Y(St)H 3C1.3	3x1x1.3	0.6	0.9
RE-2Y(St)H 4C1.3	4x1x1.3	0.6	0.9
RE-2Y(St)H 5C1.3	5x1x1.3	0.6	1.0
RE-2Y(St)H 8C1.3	8x1x1.3	0.6	1.0
RE-2Y(St)H 10C1.3	10x1x1.3	0.6	1.1



Caledonian Cable Code	RE-2Y(St)H		
	No. of Cores x1xCross Section	Nominal Insulation Thickness	Nominal Outer Sheath Thickness
	No.x1xmm ²	mm	mm
RE-2Y(St)H 12C1.3	12x1x1.3	0.6	1.1
RE-2Y(St)H 14C1.3	14x1x1.3	0.6	1.1
RE-2Y(St)H 16C1.3	16x1x1.3	0.6	1.1
RE-2Y(St)H 20C1.3	20x1x1.3	0.6	1.2
RE-2Y(St)H 24C1.3	24x1x1.3	0.6	1.2
RE-2Y(St)H 27C1.3	27x1x1.3	0.6	1.3
RE-2Y(St)H 30C1.3	30x1x1.3	0.6	1.3
RE-2Y(St)H 37C1.3	37x1x1.3	0.6	1.3
RE-2Y(St)H 40C1.3	40x1x1.3	0.6	1.4
1.5mm ² , Multicore			
RE-2Y(St)H 2C1.5	2x1x1.5	0.6	0.9
RE-2Y(St)H 3C1.5	3x1x1.5	0.6	0.9
RE-2Y(St)H 4C1.5	4x1x1.5	0.6	0.9
RE-2Y(St)H 5C1.5	5x1x1.5	0.6	1.0
RE-2Y(St)H 8C1.5	8x1x1.5	0.6	1.0
RE-2Y(St)H 10C1.5	10x1x1.5	0.6	1.1
RE-2Y(St)H 12C1.5	12x1x1.5	0.6	1.1
RE-2Y(St)H 14C1.5	14x1x1.5	0.6	1.1
RE-2Y(St)H 16C1.5	16x1x1.5	0.6	1.1
RE-2Y(St)H 20C1.5	20x1x1.5	0.6	1.2
RE-2Y(St)H 24C1.5	24x1x1.5	0.6	1.3
RE-2Y(St)H 27C1.5	27x1x1.5	0.6	1.3
RE-2Y(St)H 30C1.5	30x1x1.5	0.6	1.3
RE-2Y(St)H 37C1.5	37x1x1.5	0.6	1.4
RE-2Y(St)H 40C1.5	40x1x1.5	0.6	1.4
2.5mm ² , Multicore			
RE-2Y(St)H 2C2.5	2x1x2.5	0.7	0.9

Caledonian Cable Code	RE-2Y(St)H		
	No. of Cores x1xCross Section	Nominal Insulation Thickness	Nominal Outer Sheath Thickness
	No.x1xmm ²	mm	mm
RE-2Y(St)H 3C2.5	3x1x2.5	0.7	1.0
RE-2Y(St)H 4C2.5	4x1x2.5	0.7	1.0
RE-2Y(St)H 5C2.5	5x1x2.5	0.7	1.0
RE-2Y(St)H 8C2.5	8x1x2.5	0.7	1.1
RE-2Y(St)H 10C2.5	10x1x2.5	0.7	1.2
RE-2Y(St)H 12C2.5	12x1x2.5	0.7	1.2
RE-2Y(St)H 14C2.5	14x1x2.5	0.7	1.2
RE-2Y(St)H 16C2.5	16x1x2.5	0.7	1.3
RE-2Y(St)H 20C2.5	20x1x2.5	0.7	1.3
RE-2Y(St)H 24C2.5	24x1x2.5	0.7	1.4
RE-2Y(St)H 27C2.5	27x1x2.5	0.7	1.4
RE-2Y(St)H 30C2.5	30x1x2.5	0.7	1.5
RE-2Y(St)H 37C2.5	37x1x2.5	0.7	1.5
RE-2Y(St)H 40C2.5	40x1x2.5	0.7	1.6

Note : Other conductor sizes & core configurations are available upon request.



300/500V

Rated Voltage



EN 50288-7

Standard



Flame Retardancy
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1



Reduced Fire Propagation
NF C32-070-2.2(C1)
IEC60332-3-24
EN50266-2-4




Low Toxicity
NES 02-713/NF C 20-454



Low Corrosivity
IEC60754-2
EN50267-2-2/3
NF C 32-074



Low Smoke Emission
IEC 61034-1&2
EN 50268-1&2/NF C32-073



Zero

Halogen Free
IEC60754-1
EN50267-2-1