


# Automotive Cable

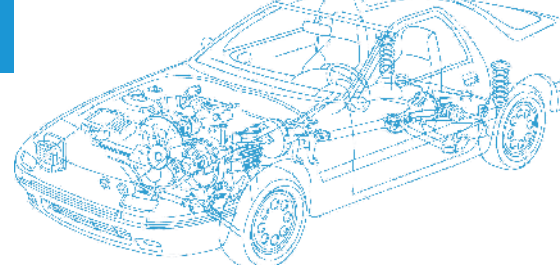


## TXL

### Application:

This XLPE insulated single-core cable is used in automotive applications where higher heat resistance, small diameter and minimal weight is required.

### Construction:

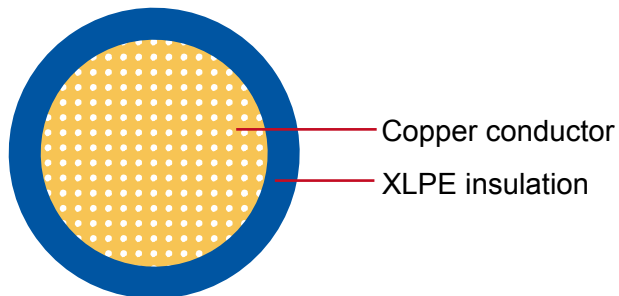

Copper conductor

XLPE insulation

**Conductor:** Soft-annealed copper according to ASTM B

**Insulation:** Polyethylene crosslinked (XLPE)

**Standard Compliance:** SAE J1128

### Technical Parameters:

**Operating temperature:** - 40 °C to +105 °C

Size	Conductor			Insulation		Cable	
	Nominal Cross-section	No. and Dia. of Wires	Diameter max.	Thickness Wall min.	Thickness Wall nom.	Overall Diameter max.	Weight approx.
AWG	mm <sup>2</sup>	No./mm	mm	mm	mm	mm	kg/km
22	1 x 0.35	7/0.25	0.76	0.28	0.40	1.70	6
20	1 x 0.50	7/0.32	0.97	0.28	0.40	1.90	8
20	1 x 0.50	19/0.19	0.95	0.28	0.40	1.90	8
18	1 x 0.80	16/0.25	1.17	0.28	0.40	2.20	11
18	1 x 0.80	19/0.23	1.17	0.28	0.40	2.20	11
16	1 x 1.00	19/0.28	1.45	0.28	0.40	2.40	15
14	1 x 2.00	19/0.36	1.80	0.28	0.40	2.70	22
12	1 x 3.00	19/0.45	2.29	0.32	0.46	3.30	34
10	1 x 5.00	19/0.57	2.87	0.35	0.50	4.00	53
10	1 x 5.00	100/0.26	3.00	0.35	0.45	3.90	53
8*	1 x 8.00	49/0.46	4.06	0.39	0.55	4.90	85

\*For SAE J1128 applications only

\*Note: Other configurations, sizes, colors and length not specified herein are available upon request.