
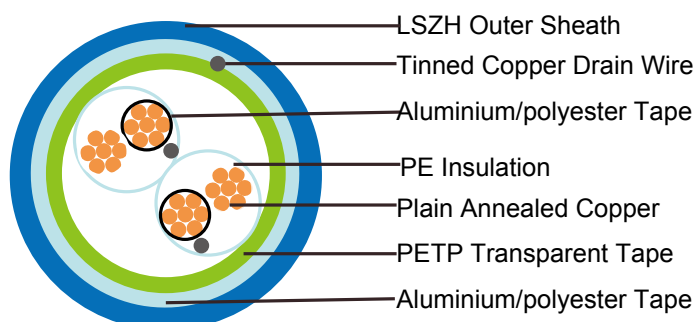


PE Insulated, LSZH Sheathed, Individual and Overall Screened Instrumentation Cables (Multipair)

RE-2Y(St)H PiMF 90°C / 300V

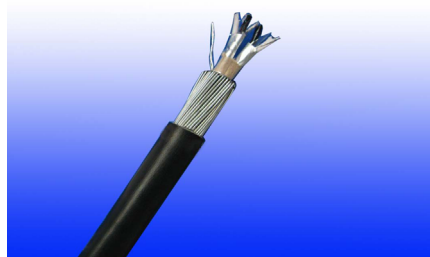

APPLICATION

The unarmoured LSZH sheathed cables are generally use for indoor installation and suitable for wet and damp areas. Generally, the cables are used within industrial process manufacturing plants for communication, data and voice transmission signals and services. Also used for the interconnection of electrical equipment and instruments, the LSZH sheath can reduce toxic smoke and fume emission.

STANDARDS

Basic design to EN 50288-7

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*
Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*
No Toxic gases	NES 02-713; NF C 20-454
Sunlight Resistance	UL 1581 section 1200
Oil Resistance	ICEA S-73-532**

Note: Asterisk * denotes superseded standard, **Test temperature +60°C, duration 4h. Retention: min 60% of



tensile strength/min.60% of elongation.

VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

Conductor: Annealed copper solid or plain copper stranded to IEC 60228 Class 2.

Insulation: PE compound, EN 50290. 2-23.

Pairs: Two insulated conductors uniformly twisted together with a specified length lay.

Individual Screen: Aluminium/polyester tape is applied over each pair metallic side down in contact with tinned copper drain wire, 0.5mm²

Binder tape: PETP transparent tape

Overall Screen: Aluminium/polyester tape is applied over the laid up pairs metallic side down in contact with tinned copper drain wire, 0.5mm²

Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1 (Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered.). UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option.

COLOUR CODE

Insulation: Black / White, continuously numbered on white core(1, 2..)for multipair.

Outer Sheath: Black or blue for intrinsically safe systems

PHYSICAL AND THERMAL PROPERTIES

Temperature Range During Operation (Fixed State): -30°C – +90°C

Temperature Range During Installation (Mobile State): -20°C – +50°C

Minimum Bending Radius: 7.5 X Overall Diameter

ELECTRICAL PROPERTIES

Conductor Area Size		mm ²	0.5	0.75	1.0	1.3	1.5
Insulation thickness (nominal)		mm	0.35	0.38	0.4	0.45	0.45
Conductor resistance (20°C)		Ω/km	36.7	25	18.5	14.2	12.3
Insulation resistance (20°C)		MΩ.km(Min.)	5000				
Mutual Capacitance (1 kHz)		pF/m(Max.)	115				
Inductance		mH/km (Max.)	1				
L / R (ratio) (max.)		μH/Ω	25	25	25	40	40
Operating voltage Urms		V	300				
Test Voltage	Core to Core	V	1500				
	Core to Screen	V	1500				

CONSTRUCTION PARAMETERS


Caledonian Cable Code	RE-2Y(St)H PiMF		
	No. of Pairsx2 xCross Section	Nominal Insulation Thickness	Nominal Outer Sheath Thickness
	No.x2xmm ²	mm	mm
0.5mm ² , Multipair			
RE-2Y(St)H PiMF 2P0.5	2x2x0.5	0.35	0.9
RE-2Y(St)H PiMF 4P0.5	4x2x0.5	0.35	1.0
RE-2Y(St)H PiMF 5P0.5	5x2x0.5	0.35	1.0
RE-2Y(St)H PiMF 6P0.5	6x2x0.5	0.35	1.0
RE-2Y(St)H PiMF 8P0.5	8x2x0.5	0.35	1.1
RE-2Y(St)H PiMF 10P0.5	10x2x0.5	0.35	1.2
RE-2Y(St)H PiMF 12P0.5	12x2x0.5	0.35	1.2
RE-2Y(St)H PiMF 16P0.5	16x2x0.5	0.35	1.2
RE-2Y(St)H PiMF 20P0.5	20x2x0.5	0.35	1.3
RE-2Y(St)H PiMF 24P0.5	24x2x0.5	0.35	1.4
0.75mm ² , Multipair			
RE-2Y(St)H PiMF 2P0.75	2x2x0.75	0.38	1.0
RE-2Y(St)H PiMF 4P0.75	4x2x0.75	0.38	1.0
RE-2Y(St)H PiMF 5P0.75	5x2x0.75	0.38	1.1
RE-2Y(St)H PiMF 6P0.75	6x2x0.75	0.38	1.1
RE-2Y(St)H PiMF 8P0.75	8x2x0.75	0.38	1.1
RE-2Y(St)H PiMF 10P0.75	10x2x0.75	0.38	1.2
RE-2Y(St)H PiMF 12P0.75	12x2x0.75	0.38	1.2
RE-2Y(St)H PiMF 16P0.75	16x2x0.75	0.38	1.3
RE-2Y(St)H PiMF 20P0.75	20x2x0.75	0.38	1.4
RE-2Y(St)H PiMF 24P0.75	24x2x0.75	0.38	1.5
1.0mm ² , Multipair			
RE-2Y(St)H PiMF 2P1.0	2x2x1.0	0.4	1.0
RE-2Y(St)H PiMF 4P1.0	4x2x1.0	0.4	1.0
RE-2Y(St)H PiMF 5P1.0	5x2x1.0	0.4	1.1



Caledonian Cable Code	RE-2Y(St)H PiMF		
	No. of Pairsx2 xCross Section	Nominal Insulation Thickness	Nominal Outer Sheath Thickness
	No.x2xmm ²	mm	mm
RE-2Y(St)H PiMF 6P1.0	6x2x1.0	0.4	1.1
RE-2Y(St)H PiMF 8P1.0	8x2x1.0	0.4	1.2
RE-2Y(St)H PiMF 10P1.0	10x2x1.0	0.4	1.2
RE-2Y(St)H PiMF 12P1.0	12x2x1.0	0.4	1.3
RE-2Y(St)H PiMF 16P1.0	16x2x1.0	0.4	1.3
RE-2Y(St)H PiMF 20P1.0	20x2x1.0	0.4	1.4
RE-2Y(St)H PiMF 24P1.0	24x2x1.0	0.4	1.5
1.3mm ² , Multipair			
RE-2Y(St)H PiMF 2P1.3	2x2x1.3	0.45	1.0
RE-2Y(St)H PiMF 4P1.3	4x2x1.3	0.45	1.1
RE-2Y(St)H PiMF 5P1.3	5x2x1.3	0.45	1.1
RE-2Y(St)H PiMF 6P1.3	6x2x1.3	0.45	1.2
RE-2Y(St)H PiMF 8P1.3	8x2x1.3	0.45	1.3
RE-2Y(St)H PiMF 10P1.3	10x2x1.3	0.45	1.3
RE-2Y(St)H PiMF 12P1.3	12x2x1.3	0.45	1.4
RE-2Y(St)H PiMF 16P1.3	16x2x1.3	0.45	1.5
RE-2Y(St)H PiMF 20P1.3	20x2x1.3	0.45	1.6
RE-2Y(St)H PiMF 24P1.3	24x2x1.3	0.45	1.7
1.5mm ² , Multipair			
RE-2Y(St)H PiMF 2P1.5	2x2x1.5	0.45	1.0
RE-2Y(St)H PiMF 4P1.5	4x2x1.5	0.45	1.1
RE-2Y(St)H PiMF 5P1.5	5x2x1.5	0.45	1.2
RE-2Y(St)H PiMF 6P1.5	6x2x1.5	0.45	1.2
RE-2Y(St)H PiMF 8P1.5	8x2x1.5	0.45	1.3
RE-2Y(St)H PiMF 10P1.5	10x2x1.5	0.45	1.4
RE-2Y(St)H PiMF 12P1.5	12x2x1.5	0.45	1.4
RE-2Y(St)H PiMF 16P1.5	16x2x1.5	0.45	1.5

Caledonian Cable Code	RE-2Y(St)H PiMF		
	No. of Pairsx2 xCross Section	Nominal Insulation Thickness	Nominal Outer Sheath Thickness
	No.x2xmm ²	mm	mm
RE-2Y(St)H PiMF 20P1.5	20x2x1.5	0.45	1.6
RE-2Y(St)H PiMF 24P1.5	24x2x1.5	0.45	1.7

Note : Other conductor sizes & core configurations are available upon request.



Rated Voltage



Standard



Flame Retardancy
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1



Reduced Fire Propagation
NF C32-070-2.2(C1)
IEC60332-3-24
EN50266-2-4




Low Toxicity
NES 02-713/NF C 20-454



Low Corrosivity
IEC60754-2
EN50267-2-2/3
NF C 32-074



Low Smoke Emission
IEC 61034-1&2
EN 50268-1&2/NF C32-073



Halogen Free
IEC60754-1
EN50267-2-1